


## TU1800T

**Standby power : 1800KVA/1440KW**
**Prime power : 1640KVA/1312KW**

### Standard features

- Engine : CUMMINS , QSK50-G7
- Charge alternator : 24V
- Governor : ECM
- Generator : STAMFORD , PI734D
- Single bearing alternator IP 23
- Insulation class H/H
- Radiator 50°C max with coolant cap
- Skid and vibration isolators
- Dry type air filter
- Main line circuit breaker
- 24V battery and cable
- User's manual

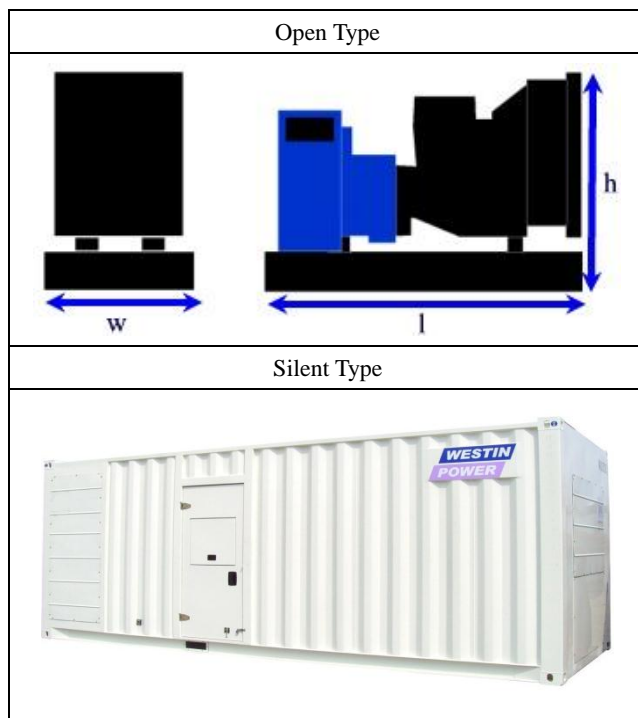

### Weight and Dimensions

GEN-Set	Dimension ( L×W×H )	Weight
Open Type	5780mm×2200mm×2555mm	10964 Kg
Container Type		

### Generator Ratings

Voltage	Hz	Phase	Power factor	Standby AMP	Standby Rating (KVA/KW)	Prime Rating (KVA/KW)
400/230	50	3	0.8	2598	1800/1440	1640/1312

### Engine Data

Manufacturer/Model	CUMMINS QSK50-G7 4-cycle
Cylinder /Arrangement	16 /60° V
Displacement	50.3 L
Bore and Stroke	159 mm×159 mm
Compression ratio	15.0 : 1
Rated RPM	1500 RPM
Max. stand by power at rated RPM	1581KW
Frequency regulation , steady state	≤ 1%
Governor : type	ECM

### Exhaust System

Exhaust gas flow	5360 L/s
Exhaust temperature	520°C
Max back pressure	6.8 kpa

**Fuel System**

Fuel consumption 100% (of the Prime Power)	341 L / h
--	-----------

**Oil system**

Total oil capacity w/filters	204 L
------------------------------	-------

**Air intake**

Engine air flow	2080 L/s
-----------------	----------

**Coolant System**

Radiator & engine capacity	140 L
Max water temperature	104 °C
Thermostat	82-93 °C

**Generator Data**

Manufacturer / Type	STAMFORD / PI734D
Number of phase power	3
Factor (Cos Phi)	0.8
Pole : number	4
Bearing : number	1
Coupling	Direct
Exciter type	PMG
Insulation : class , temperature rise	H / H
protection	IP23

**Control panel**

The DSE7320 is made by DEEPSEA in England and is a new control module for single gen-set applications, and it is an Automatic Start Control Module and is simple to operate, and the module includes USB, RS232 and RS485 for expansion device connectivity.

Specifications: Frequency meter, Ammeter, Voltmeter  
Alarms and faults Oil pressure, water temperature, No start-up, Over speed, Min/max alternator, Min/max battery voltage, Low fuel level, Emergency stop. Connect to VOLVO J1939.

Engine parameters: Hours counter, Oil pressure, Water, temperature, Engine speed, Battery voltage, Fuel level.

Note: All data sheets are for reference only and subject to change without prior notice.